

## Infrared emitter IRS 4


### For integration in the IR cabin

Casing: electrolytic galvanised steel plate  
 Reflector: burnished aluminium reflector  
 Covering grille: with protective flock spray  
 Assembly: horizontal or vertical, no ceiling suspension  
 Power input: 400 W

Completely premounted with 3 m silicone connecting cable  
 3 x 1.5 mm<sup>2</sup> and ready-made connecting plug.




### Connection diagram

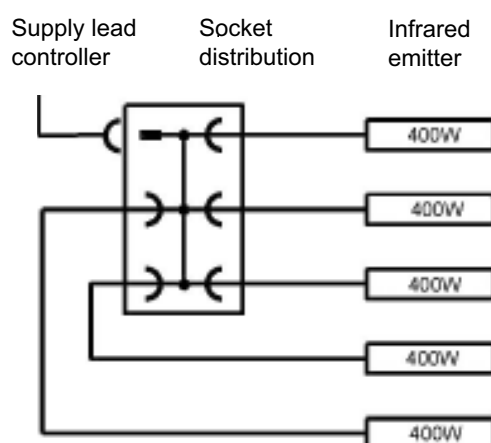


MADE IN GERMANY


### Vertical installation on cabin wall

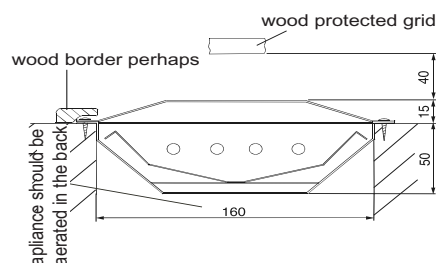


### Vertical installation in the cabin corners

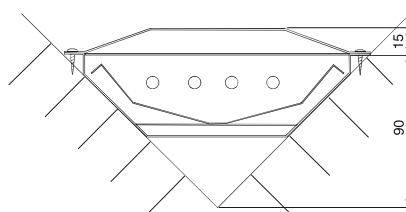

### Front sight

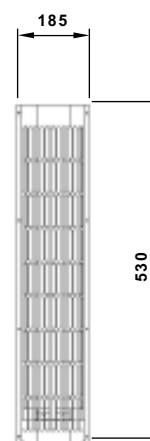

### Cut-out of the wall

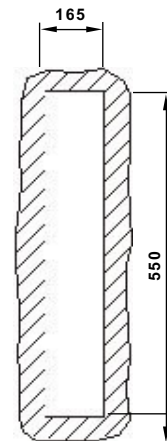

Art.No.	electrical connection / power	Emitter	Surface temperature	Spectrum	Dimensions H/W/D in cm	Cut-out for mounting	Weight without package	For operation with control units
94.2862	230 V N AC 50 Hz 400 W	Magnesium	400 - 600° C	2 - 10µm IR-B IR-C	53 / 18,5 / 6,5	55 x 16,5	ca. 2 kg	60 IR EMOTEC HIC 75

Subject to technical modifications