

# Sauna heater P1


Free standing heater

For hotel and commercial saunas


Outer shell:	bright high-grade steel
Inner shell:	bright high-grade steel
Stone basket:	bright high-grade steel
Rear wall:	bright high-grade steel
Terminal box:	bright high-grade steel
Stone filling:	30 kg incl.



## Connection diagram

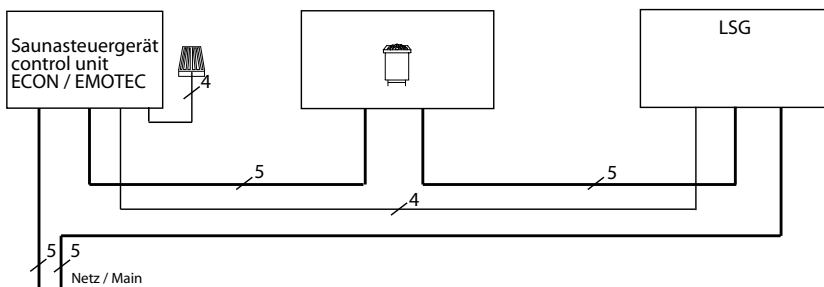


CE IP x4 AH SE  
MADE IN GERMANY



Capacity acc. DIN	Electrical Connection	Fuse control unit in A	Fuse LSG in A	Connecting cable main - control unit in mm <sup>2</sup>	Connecting cable main - LSG in mm <sup>2</sup>	Connecting cable control unit - heater in mm <sup>2</sup>	Connecting cable LSG - heater in mm <sup>2</sup>	Connecting cable control unit - LSG in mm <sup>2</sup>
12 kW	3N AC 50 Hz 400 V	3 x 16	3 x 16	5 x 2,5	5 x 2,5	5 x 1,5	5 x 1,5	4 x 1,5
15 kW								

All cross sections of a line are minimum diameters in mm<sup>2</sup> (Copper line)



Art.-No.	Outer shell	Capacity acc. DIN	Installation dimensions H/W/D cm	For cabin size	Minimum dimensions of air intake and exhaust vents	Weight without stones without package	Stone filling	Power switch gear needed	For operation with control units
90.8775	high-grade steel	12 kW	72/63/38	14 - 18 m <sup>3</sup>	35 x 7 cm*)	25,5 kg	30 kg	ECON L09 EMOTEC L09	ECON A1 ECON A2 ECON H2 EMOTEC B6000 EMOTEC DC9000 EMOTEC DC9000 DB/DL EMOTEC HCS 9003 EMOTEC HCS 9003 DB/DL
90.8776		15 kW		18 - 25 m <sup>3</sup>	35 x 9 cm*)				

\* or in accordance with the instructions of the cabin manufacturer

Subject to technical modifications