

Sauna heater Bi-O-Mat U


For hotel and commercial sauna

Outer shell: bright high-grade steel
Inner shell: bright high-grade steel
Water container: for approx. 5 litres
Stone filling: 15 kg incl.


Stone basket with infusion bowl over full heater width.
Infusion funnel with 1 m of silicone extension hose.
6 metres each of silicone electrical connecting cable for the vaporiser and heating unit premounted.
High-grade steel herb bowl for herbs and essential oils.

Connection diagram

6 - 9 kW

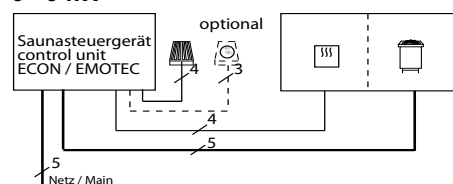

12 kW

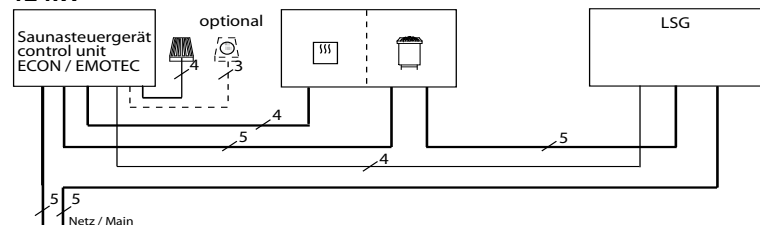

Capacity acc. DIN	Vaporiser	Electrical. Connection	Fuse control unit in A	Fuse LSG in A	Connecting cable main - control unit in mm²	Connecting cable main - LSG in mm²	Connecting cable control unit - heater in mm²	Connecting cable LSG - heater in mm²	Connecting cable control unit - LSG in mm²
6,0 kW	1,5 kW	3N AC 50 Hz 400 V	3 x 16	3 x 16	5 x 2,5²	5 x 2,5²	5 x 1,5² & 4 x 1,5²	5 x 1,5²	4 x 1,5²
8,0 kW									
9,0 kW									
12,0 kW									

All cross sections of a line are minimum diameters in mm² (Copper line)



Art.-No.	Outer shell	Capacity acc. DIN	Vaporizer	Installation dimensions H/W/D cm	For cabin size	Minimum dimensions of air intake and exhaust vents	Weight without stones without package	Stone filling	Power switch gear (LSG) needed	For operation with control units
94.1124	high-grade steel	6,0 kW	1,5 kW	100 / 112 / 20	6 - 8 m³	35 x 4 cm *	31,5 kg	15 kg	no	ECON A1 ECON A2 ECON H2 EMOTEC B6000 EMOTEC DC9000 EMOTEC DC9000 DB/DL EMOTEC HCS 9003 EMOTEC HCS 9003 DB/DL
94.1125		8,0 kW			7 - 10 m³	35 x 5 cm *	32,5 kg			
94.1126		9,0 kW			9 - 14 m³	35 x 6 cm *	33,0 kg			
94.1127		12,0 kW			14 - 18 m³	35 x 7 cm *				

Rear bench heater with vaporiser



CE  IP x4 

MADE IN GERMANY

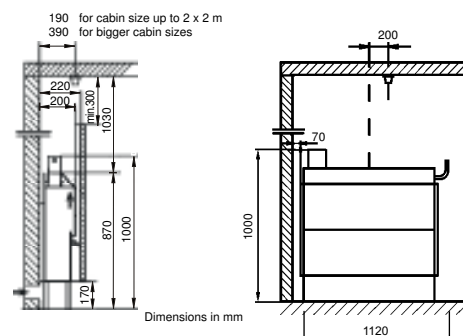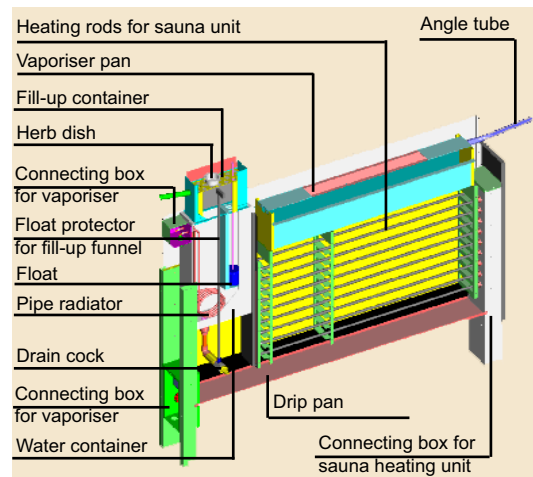

Subject to technical modifications