# emotion of sauna.



## Sauna heater Fin-Tec

#### Wall mounted heater

### For family sauna

Outer shell: anthracite pearl effect

cladding of diecast aluminium

Inner shell: high-grade steel


Rear panel: galvanized steel plate

Stone basket: high-grade steel

Terminal box: galvanized steel plate

Stone filling: 15 kg incl.


#### **Connection diagram**

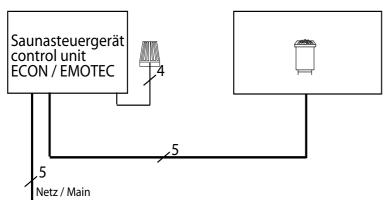






MADE IN GERMANY

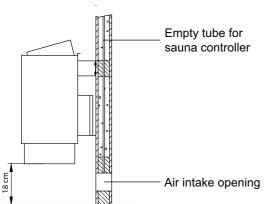



ArtNo.	Outer shell		Electrical. Connection	Fuse control unit in A	Installation dimensions H/W/D cm	For cabin size	Minimum dimensions of air intake and exhaust vents	Weight without stones without package	Stone filling	Connecting cable main - control unit in mm²	Connecting cable control unit - heater in mm²	Power switch gear (LSG) needed	For operation with control units
94.3137	anthracite	4,5 kW	3N AC 50 Hz 400 V	3 x 16	78**/ 37,5 / 36	4 - 6 m³	35 x 3 cm*	11,0 kg 12,5 kg	15 kg	5 x 2,5	5 x 1,5	no	ECON A1 ECON A2 ECON H2 EMOTEC B6000 EMOTEC DC9000 EMOTEC DC9000 DB/DL EMOTEC HCS 9003 EMOTEC HCS 9003 EMOTEC HCS 9003 DB/DL
94.3138	anthracite	6,0 kW				6 - 8 m³	35 x 4 cm*						
94.3139	anthracite	7,5 kW				7 - 10 m³	35 x 5 cm*						
94.3140	anthracite	9,0 kW				9 - 14 m³	35 x 6 cm*						

All cross sections of a line are minimum diameters in mm² (Copper line)

 $<sup>^{\</sup>star}$  or in accordance with the instructions of the cabin manufacturer  $^{\star\star}$ ) during 18 cm ground clearance