emotion of sauna.



Saunaofen Herkules S60 vapor

For commercial sauna

Free standing heater

Outer shell: The exterior design features a striking

combination of straight lines, massive yet elegant steel with the raw sauna

rocks.

The internal and external shell is completely made of the best quality

stainless steel.

Water container: for approx. 8 litres Terminal box: high-grade steel

Stone filling: 60 kg incl. Service friendly unit assembly system

The heating elements are mounted on a rack and may be conveniently removed without the need to remove the rocks.


Optimised ratio of radiated heat and convection due to the appropriate amount of stones.




C €MADE IN GERMANY

Connection diagram

12 - 15 kW

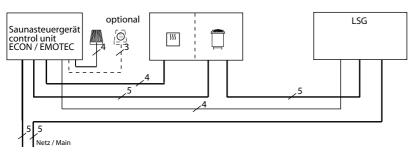



Capacity acc. DIN	Vaporicer	Electrical. Connection	Fuse control unit in A		Connecting cable main - control unit in mm²	Connecting	Connecting cable control unit - heater in mm²	cable LSG	Connecting cable control unit - LSG in mm²
12,0 kW	2.0 kW	3N AC 50 Hz	3 x 16	3 x 16	5 x 2,5	5 x 2,5	5 x 1,5 &	5 x 1.5	4 x 1.5
15,0 kW	2,0 KVV	400 V	3 % 10	3 % 10	3 X 2,3	3 X 2,3	4 x 1,5	3 X 1,3	4 X 1,5

All cross sections of a line are minimum diameters in mm² (Copper line)

ArtNo.	Outer shell	Capacity acc. DIN	Vaporicer	Installation dimensions H/W/D cm	For cabin size	Minimum dimensions of air intake and exhaust vents	Weight without stones without package	Stone filling	Power switch gear (LSG) needed	For operation with control units
94.4270	Grinded stainless	12,0 kW	2,0 kW	85 / 53 / 53	14 - 18 m³	35 x 7 cm *	34 kg	60 kg	ECON L09 EMOTEC L09	ECON H2 EMOTEC HCS 9003 EMOTEC HCS 9003 DB/DL
94.4271	steel / anthracite	15,0 kW			18 - 25 m³	35 x 9 cm *				

^{*} or in accordance with the instructions of the cabin manufacturer